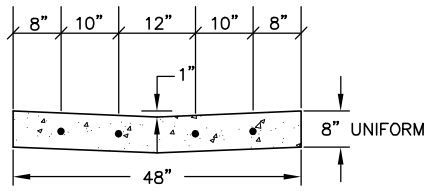

VALLEY GUTTER – SECTION A–A

NOTES:

- 8" CONCRETE PAVEMENT MEASURED OUTSIDE NORMAL CURB AND GUTTER.
- WHEN PAID SEPARATELY #4 REBAR WILL BE PAID AT 0.67 LBS/LF
- BARS SHALL BE GRADE 60 STEEL
- CHAIRS OR BASKETS ARE REQUIRED (INCIDENTAL)
- WHEN CONSTRUCTING IN HALVES, EXTEND BARS 4' INTO ADJACENT POUR AREA

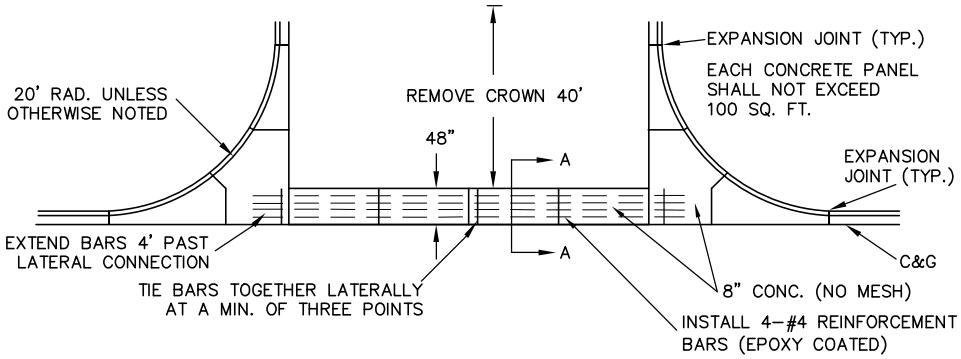

116 – VALLEY GUTTER AT INTERSECTION

116 – Valley Gutter.dwg 5/2015

H:\Cad_Comn\Details Updated\0 – 100 – STREET complete\116 – Valley Gutter

CITY OF BLOOMINGTON MINNESOTA
1700 W 98TH ST.
BLOOMINGTON MN 55431
PHONE (952) 563-8700

ENGINEERING DIVISION
PUBLIC WORKS DEPARTMENT

PLATE NAME:

116 – Valley Gutter

LAST REVISED: 4/11/2017

LAST REVISED BY: KBO