


ADJUSTING RINGS

- SHALL BE PRECAST, 2" THICK, AND REINFORCED WITH 8 GAUGE STEEL WIRE.
- SET EACH RING IN A FULL BED OF MORTAR.
- TOTAL ADJUSTMENT HEIGHT SHALL BE BETWEEN 6" AND 12".

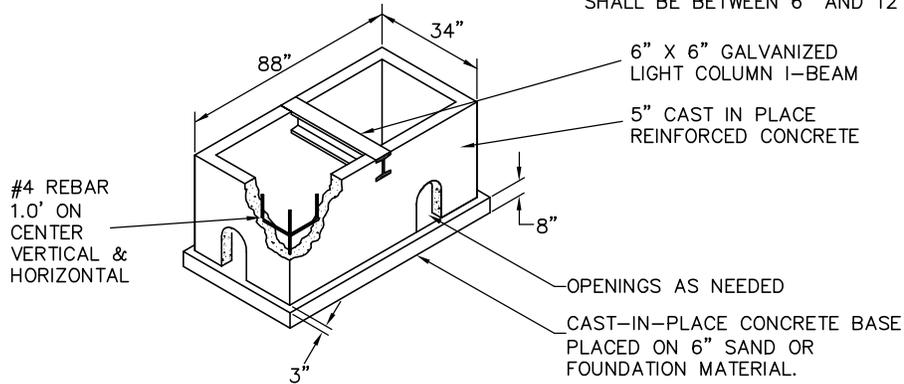

NOTE:
NO LIFT HOLES ARE ALLOWED

208 - STD DOUB CD (W-I BEAM)
208 - STD DOUB CD (W-I BEAM).DWG 9/2016

H:\Cad_Comm\Details Updated\0 - 200 - STORM complete\208 - Std Doub CD (w-I Beam)

CITY OF BLOOMINGTON MINNESOTA
1700 W 98TH ST.
BLOOMINGTON MN 55431
PHONE (952) 563-8700

**ENGINEERING DIVISION
PUBLIC WORKS DEPARTMENT**

PLATE NAME:

208 - Std Doub CD (w-I Beam)

LAST REVISED: 9/14/2016

LAST REVISED BY: KBO